



Features:

- Cell phone or tablet can be used as a remote control.
- 3 separate channels control the intensity from 0-99%.
Channel 1: COB (mainly red).
Channel 2: half of the 5W diodes (mainly blue).
Channel 3: half of the 5W diodes (UV,IR , White etc.)
- One APP can control unlimited number of fixtures at the same time or in different groups ,perfect for large grow areas.
- Connect the gateway to the router , devices can be controlled worldwide .
- Data can be shared between two controllers.
- Timing function available .
- Full spectrum , ideal for seedling to harvest growth .
- 50000 hours rating .

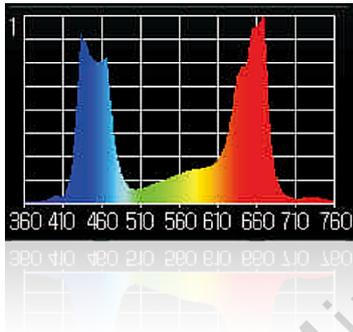

Auto-WiFi LED Grow Light

Led Power	600w	900w	1200w
Lux (centre)	29921,0.3M/9612,0.6M 9015,0.9M/3396,1.2M	42894,0.3M/22401,0.6M 10638,0.9M/7606,1.2M	56712,0.3M/43789,0.6M 25220,0.9M/15890,1.2M
Lumen	10150Lm	15400Lm	21050Lm
Lighting Area	3'*3'	3'*4'	3'*5'
Size	468X385X118 mm	660X385X118 mm	848X385X118 mm
Packing Dimension	61X49X22cm/PCS	610X490X220mm/PCS	100X49X22cm/PCS
GW	10.6kg/pcs	15.0kg/pcs	19.0kg/pcs
Voltage	AC85-265V		
Lighting time per day	12-18 Hours		
Height above the Plant	0.3M/0.6M/0.9M/1.2M		
Wavelength	Red: Blue: Orange:White: UV:IR		
Angle of leds	90°-120°		
Life time	50,000hours		
Warranty	3 years		

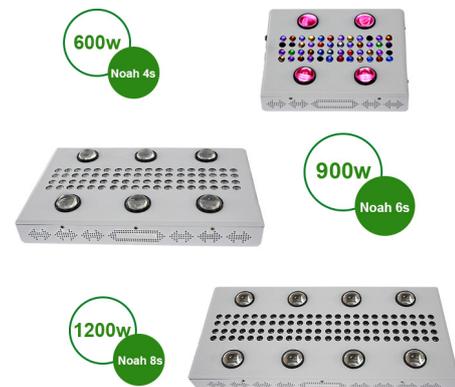




LED lights control quantity :1-5000pcs

- PS:1. Connect phone /tablet with ziggbee gateway , the effective distance between phone , gateway ,and lights are 30m (barrier free)
2. Connect the Zigbee Gateway to the WIFI router , you can control your lights in every corner of the world .

3 Dimmers

Auto-WiFi Control

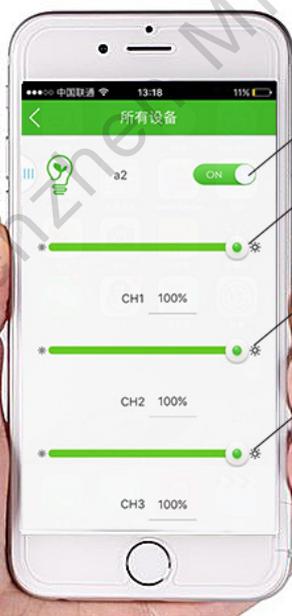

TURN ON/OFF BUTTONS (01)


RED COB DIMMER (02)

BLUE 5W LED DIMMER (03)

OTHER 5W LED DIMMER (04)




(02) RED DIMMER



(03) BLUE DIMMER



(04) OTHER LIGHT DIMMER



(01) FULL SPECTRUM

Shenzhen Mingxue Optoelectronics Co.,Ltd.